


TK MODULAR PARTITION SYSTEM

DOUBLE-TK SOLUTION

All-glass partition system without spacer profiles,
consisting of double glass panes fixed with
profiles along the perimeter
Details assembled on site

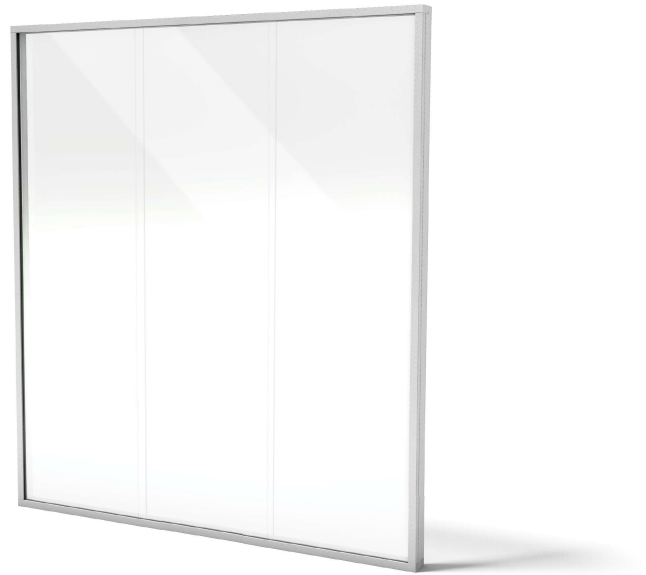

WIDTH (W)*

150 - ∞ mm

HEIGHT (H)*

240 - 4000 mm

PROFILES*

30 x 92 / 120 mm

CONDITIONS FOR INSTALLATION OPENING'S MEASUREMENTS

Opening height (H) = product size
Deviation tolerance = +5...-1

Opening Width (L) = product size
Deviation tolerance = +6...-2

NB! The largest allowed deviation of the horizontal
and vertical surfaces m+/-3mm per 2000mm

PROFILE MATERIAL

Aluminium

FILLING MATERIAL OPTIONS

Glass

FINISH FOR PROFILES

Natural anodisation, paint (RAL)

PROFILE SEAL FINISH

Colourless

GLASS-GLASS JOINTS

Silicone / silicone tape

VARIOUS GLASS TYPES AVAILABLE**

55.2 SC + 66.2 SC = Rw 43 dB
(Report No. EUFI29-19001273-T2-EN)
Special glass by agreement

EXTRAS

Film coating, smart glass

*Maximum area of one glass unit 3 m²
Height depends on the thickness of the glass
Taller glass by special agreement
Tempered glass width/height ratio 1/10

**Alternative glass options available upon mutual agreement

