


VAL MODULAR PARTITION SYSTEM

# VAL HINGED DOOR WITH A L-FRAME, DOUBLE-LEAF



The door leaves and frame are in the same plane in the front view Finger-jointed glue-laminated timber frame

Consists of an active door leaf and a passive door leaf WIDTH (W)\*

M7 (690 mm) - M10 (990 mm) + M3 (300 mm) - M9 (900 mm)

HEIGHT (H)\*

M21 (2090 mm) – M24 (2390 mm)

DEPTH\*

92 mm

CONDITIONS FOR INSTALLATION OPENING'S MEASUREMENTS

Opening height (H) = product size +10mm Deviation tolerance = +5...-4

Opening Width (L) = product size +20mm Deviation tolerance = +10...-8

NB! The largest allowed deviation of the horizontal and vertical surfaces m+/-3mm per 2000mm



**FINISH** 

Paint, veneer, varnish, stain, HPL (laminate)

THRESHOLD

None, oak, drop-down seal

HINGES

Rolled hinges, galvanised

LOCK CASE\*\*

LC190 (lockable), LC290 (not lockable), EL580 (electrically lockable)

### Product types

Туре	WM1-27	WM1-39	WM1-42
Sound insulation index (Rw)	-	39 dB	42 dB
Glass used in glass opening (Rw)	6 (30 dB)	44.2 SC (37 dB)	66.2 SC (40 dB)


#### **EXTRAS**

## Kickplate, concealed hinges

<sup>\*</sup>Custom dimensions upon agreement

<sup>\*\*</sup>Custom solutions upon agreement

# Wallenium

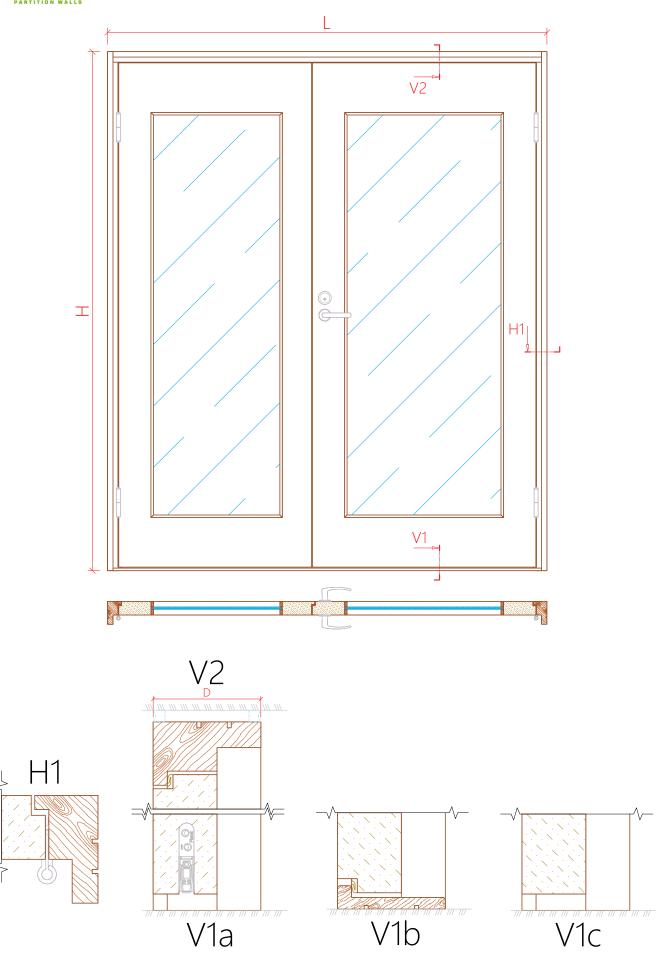

# WallEnium

