


VAL MODULAR PARTITION SYSTEM

VAL HINGED DOC WITH A L-FRAME, SINGLE-LEAF



WIDTH (W)*

M7 (690 mm) - M10 (990 mm)

HEIGHT (H)*

M21 (2090 mm) - M24 (2390 mm)

DEPTH*

92 mm

CONDITIONS FOR INSTALLATION OPENING'S MEASUREMENTS

Opening height (H) = product size +10mm Deviation tolerance = +5...-4

Opening Width (L) = product size +20mm Deviation tolerance = +10...-8

NB! The largest allowed deviation of the horizontal and vertical surfaces m+/-3mm per 2000mm



FINISH

Paint, veneer, varnish, stain, HPL (laminate)

THRESHOLD

None, oak, drop-down seal

HINGES

Rolled hinges, galvanised

LOCK CASE**

LC190 (lockable), LC290 (not lockable), EL580 (electrically lockable)

Product types

Туре	WM1-27	WM1-39	WM1-42
Sound insulation index (Rw)	-	39 dB	42 dB
Glass used in glass opening (Rw)	6 (30 dB)	44.2 SC (37 dB)	66.2 SC (40 dB)


EXTRAS

Kickplate, concealed hinges

^{*}Custom dimensions upon agreement

^{**}Custom solutions upon agreement

WallEulum

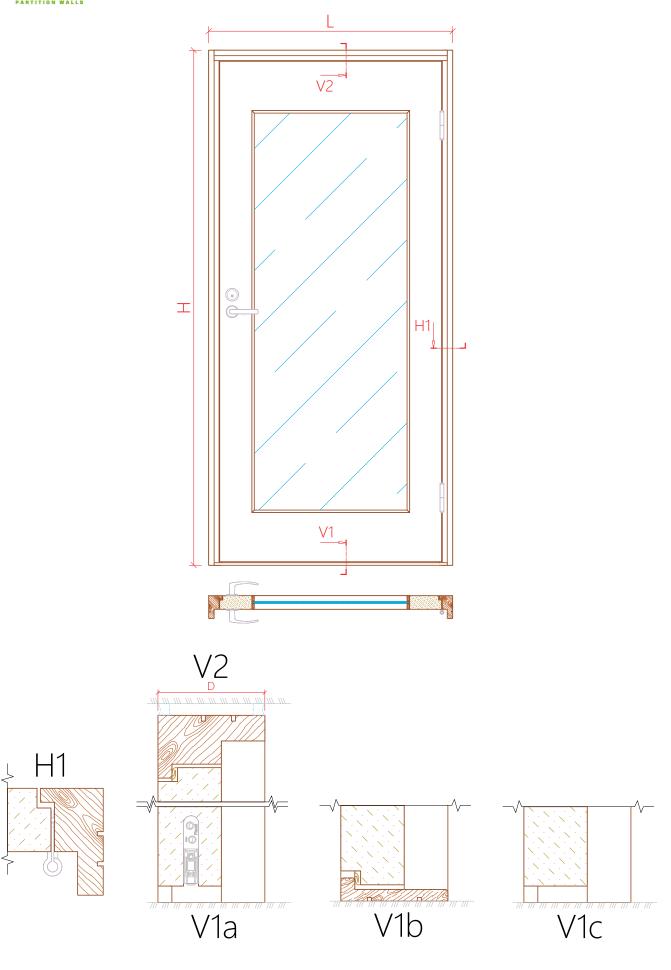

${\tt WallEnium}$

